



Arctic Cotton Chopped Nuts Mountain Summit Dale Mist PPG1002-2 PPG1097-3 Mountain Summit PPG1029-1





Lettuce Alone Malted Mint PPG1222-4 PPG1139-2

Everglade Mist PPG1150-3










## British Standards BS4800 Colour Range

Jurassic Coast PPG1093-2 Wet Weekend Zombie PPG1093-2 PPG1010-2 RPV 67 LRV 15 PPG1010-7

Unde	rcoat Key		
UC01	White	UC50	Deep Cream
UC44	Pearl	UC52	Mid Grey
UC45	Bright Orange	UC53	Dark Grey
UC46	Mid Blue	UC56	Ochre
UC47	Tan	UC57	Cream
UC48	Slate	UC62	Red
UC49	Light Green	UC63	Dark Red
LRV	Light Reflectance Value	(see bo	ack cover for more information)

# **Heavy Duty Floor Paint**

Empire Green	Tile Red		Nimbus Grey		Frigate	
14 C 39 LRV 8		LRV 9	10 A 03	LRV 56	18 B 21	LRV 31





Mercury



12 B 29 UC48 00 A 09 UC52 10 A 11 UC48 08 C 37 UC56 LRV 21 LRV 13 LRV 21

00 E 53 UC 53 18 B 25 UC 53 00 A 13 UC 53 08 C 39 UC 47 LRV 1 LRV 8 LRV 8






Golden Brown French Grey Forest Creek

06 D 45 UC47 10 B 21 UC52 12 D 45 UC48 12 E 53 UC49 LRV 15 LRV 30 LRV 15 LRV 42

06 C 39 UC47 08 B 21 UC52 12 B 25 UC52 12 C 39 UC53 LRV 7 LRV 30 LRV 13 LRV 7

08 B 17 UC50 10 B 15 UC57 12 B 17 UC44 10 E 49 UC57 LRV 61 LRV 84 LRV 57 LRV 76





14 C 31 UC01 16 C 33 UC44 18 E 50 UC46 20 C 33 UC44 LRV 57 LRV 57 LRV 67 LRV 59

Delphinium Hydrangea








18 B 29 UC53 22 D 45 UC48 02 C 40 UC53 04 C 39 UC63 LRV 7 LRV 7

 Cygnet
 Blossom
 Flamingo Feather
 Sugar Almond

 18 C 31
 UC01 LRV 80
 04 E 49
 UC57 LRV 75
 02 C 33
 UC44 LRV 59
 04 B 15
 UC57 LRV 76

18 B 17 UC44 04 B 17 UC44 02 C 37 UC62 04 C 33 UC57 LRV 59 LRV 61 LRV 20 LRV 56

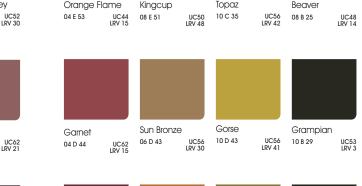



04 D 45 UC63 06 E 56 UC56 10 D 45 UC56 08 B 29 LRV 21 LRV 21

 Tango
 Laburnum
 Mimosa
 Lizard

 06 E 51
 UC45
 10 E 50
 UC01
 10 C 33
 UC50
 10 B 25
 UC53

 LRV 42
 LRV 67
 LRV 68
 LRV 68
 LRV 14

04 E 51 UC45 06 E 50 UC57 10 E 53 UC50 10 C 39 UC47 LRV 51 LRV 57 LRV 61 LRV 9















**SpinO** & Colour Product



#### Light Reflectance Value (LRV)

LRV is a measurement that tells you how much light a colour reflects. Visual contrast is achieved by differences in LRV. To meet the requirements of the The Equalities Act, the Building Regulations Part M recommends a minimum of 30 points between colours on adjacent critical surfaces (e.g. floors/walls). A wall colour with a higher LRV can also suppor sustainable lighting plans by helping to propagate daylight into a space and reduce the amount of lighting required.

Health & Safety The Health and Safety at Work Act 1974 places a responsibility upon manufacturers and suppliers of substances for use at work to ensure, so far as is reasonably practical, that they will be without risk to health when properly used. Suppliers are also required to provide users with information on the nature of any hazards of the materials supplied, together with recommended precautions for their safe use. Please refer to the

Waste & Product Disposal Purchase only the correct amount for the job to be carried out by using the coverage rate given on the product container. Scrape as much product as possible from equipment before cleaning. Use only the minimum amount of aner and re-use as often as possible. Ensure container is re-sealed fully after use. Store i waste paint. Do not empty product into drains or watercourses.

Lead in Previously Painted Surfaces Special precautions should be taken during surface preparation of pre-1960's paint surfaces over wood and metal as they may contain harmful lead. For further advice contact Technical Advisory.

Further Information We have produced the colours shown on this colour card as accurately as printing will allow. Please ensure you use a Tester Pot before decorating as a colour can appear very different depending on the lighting available and the room and surface where it is being used.

Your local Leyland Trade stockist





Email: customersupport.acuk@ppg.com









## About us


Leyland Trade offer a core range of quality, affordable trade paints that you can rely on for a job well done. This expertise is built through our longstanding heritage - we've been making paint since 1922.

## **Product features key**





Apply with trowel





Suitable for interior & exterior use



## **Product features**



## **WATER BASED**

Water based paints in this booklet have minimal/very low VOCs (Volatile Organic Compound) and are easily recognised by their very low odour and quick drying properties.

Water based paints are sometimes referred to by customers as:

- Acrylic paints
- Quick drying paint
- Low odour paints



## **SOLVENT BASED**

Solvent based paints in this booklet have high/very high VOCs which are released into the atmosphere as the paint dries. Solvent based paints are easy to apply, tough and durable. Solvent based paints are sometimes referred to by customers as:

- Alkyd based
- Traditional paint
- Oil based
- Spirit based

#### No brush or roller marks · Quick and easy touch up when applied to damaged areas

**Smart Matt** 

## Professional result with every application **Smart Multi-Surface**

• Suitable for use on walls, ceilings, wood and metal

# • Moisture resistant - suitable for all rooms

# Tough and durable satin finish

PACK SIZE COVERAGE RECOAT APPLICATION INTERIOR/ VOC

#### **Hardwearing Acrylic Eggshell** • Suitable for kitchens, bathrooms

#### and busy areas Superior durability • Stain and moisture resistant

- **Hardwearing Matt** • Suitable for kitchens, bathrooms
- and busy areas • 10 times tougher than Vinyl Matt

22° IIII

Walls

20

ceilings

Spe

 $\Omega$ 

alist coatings

#### • Stain and moisture resistant **Vinyl Matt** Wipeable finish

· Excellent covering power Hides imperfections 1 III 2

#### **Vinyl Silk** • Washable finish

• Easy to apply • Easy to clean

## **Vinyl Soft Sheen**

 Washable finish Easy to apply · Easy to clean



## **Contract Matt**

· Ideal for most large jobs and new builds Good covering power

## **Contract Silk**

· Ideal for most large jobs and new builds Wipeable finish



## Masks stains and smells

 Excellent adhesion Suitable for interior and exterior masonry surfaces and fibreglass

#### **Anti-Damp Paint** Resists blistering

- Mid-sheen finish • Suitable for all types of wall surfaces
- Damp Block

# Provides a water resistant barrier

 Masks damp spots and water marks • Suitable for overcoating with wallpaper or any emulsion paint

## **Stain Blocking Primer**

#### Prevents stains from reappearing Locks in stains

# **Direct to Metal Paint**

# Hardwearing protection

#### • Smooth, semi-gloss finish Suitable for bare, previously painted or

- weathered metal surfaces **Anti-Corrosive Metal Primer**
- Inhibits rust • Suitable for all metal surfaces

## • Overcoat with any Leyland trim product **MDF Primer**

- Suitable for use on interior and exterior, medium density fibre board
- Low odour



• Textured, semi-gloss finish • Suitable for concrete, steel and wooden floors

## Slip resisting **Heavy Duty Floor Paint (Colours)**

- Tough and durable resistant to mild chemicals • Protective satin finish • Suitable for concrete and wood floors

#### **Heavy Duty Floor Paint (Clear)** • Tough and durable - resistant to mild chemicals

 Protective satin finish Suitable for concrete and wood floors









## PACK SIZE COVERAGE RECOAT APPLICATION INTERIOR/ VOC **High Gloss** High quality gloss finish Tough and durable Excellent flow and levelling properties to allow easy application **One Coat Gloss** Quick application Excellent covering power • Self-undercoating **Non-Drip Gloss** Drip resistant Self-undercoating • Easy to apply Satinwood High quality satin finish Tough and durable Self-undercoating **Eggshell** · A high quality mid-sheen finish Tough and durable Washable finish Undercoat Ideal base coat for gloss Great covering power Provides adhesion **Acrylic Primer Undercoat** Suitable for interior and exterior wood, plaster, drywall and render A general purpose, water-based undercoat • Quick drying with low odour

## **Wood Primer**

- Suitable for interior and exterior bare timber Excellent adhesion • Smooths uneven surfaces
- **All Purpose Primer** · Suitable for interior and exterior wood, metal, plaster and masonry

Anti-corrosive properties

- Provides adhesion **Fast Drying Gloss**
- Non-yellowing and low odour • Excellent flow and levelling properties Suitable for interior and exterior wood

#### Fast Drying Satin Non-yellowing and low odour Excellent flow and levelling properties

and metal

٥

٥

•

tr 10 0

SECT AND

100" BE

- and metal **Fast Drying Undercoat** Provides excellent adhesion
- · High opacity and low odour • Suitable for interior and exterior wood and metal

• Suitable for interior and exterior wood

- **Smooth Masonry** Protects against weathering for up to 15 years
- Suitable for all masonry surfaces = III B Anti-carbonation properties **Pliolite Based Masonry** 
  - Can be applied in temperatures as low as -5°C Resistant to rain within 20 minutes of application
  - Smooth, robust matt finish **Hi-Textured Masonry** • Up to 10 years protection

• Suitable for all masonry surfaces

- Robust and durable **Fine Textured Masonry**
- Protects against weathering for up to 10 years Suitable for all masonry surfaces

• Anti-carbonation properties

- **Stabilising Masonry Primer** · A clear solution for binding friable,
- chalky masonry surfaces Use with Truguard masonry coatings Highly penetrative

#### Flexible Exterior Gloss • Flexible, durable and water-resisting

- gloss finish Outperforms conventional gloss by up to 2 years Use with Truguard Flexible Exterior Undercoat

#### Flexible Exterior Undercoat Suitable for timber and metal • Use with Truguard Flexible Exterior Gloss

# Interio Qo 7

•

MZ/JUNE 48-72 HRS MINIMAL

# **Technical** Support is available

We have an experienced team who are here to help! They're dedicated to providing you with a high quality, effective service and back up support. So that at every step of the way and whilst building relationships with your customers and clients, we'll help you to differentiate your business.

Our extensive package of technical support services are just a phone call away. We're here to guide you through key issues that affect the selection and application of all of our surface coatings.

Find out more about Leyland Trade product options by calling us today on:

01924 354 354



20